



B1350

Tripod turnstile

*"With a great value for money. Ensures
SECURE ACCESS CONTROL in high traffic areas
with great deterrent to potential intruders"*



The small size of the **B1350 SALFORD** tripod turnstiles provide discounts for small spaces, while creating a great deterrent effect to potential intruders.

Especially suitable for intensive movements of people, both inside and outside protected from water.

They are designed for installations of all kinds, are shaped compact unit and are equipped with preinstallation of readers, keypad and display on the head. They are also equipped with pictogram signs by which visual reports of their state of operation.

Also have a large space inside to accommodate electronic devices for access control.

B1350 SALFORD tripod turnstiles can operate in UNIDIRECTIONAL and BIDIRECTIONAL modes.

In the event of a power cut or power failure, the turnstile arms are lowered allowing free exit. As an option, also has a ANTI PANIC system with automatic folding his arms leaving open space for building evacuation.

Have easy access inside through its top and side covers for the initial anchorage to the ground and the other works of installation and maintenance. The covers are protected with security locks


All components used in the manufacture of **SALFORD** products have been selected to achieve the best results in DURABILITY, STRENGHT and SAFETY.

Specifications

- **Power supply:**
110/230 V AC 50/60 Hz.
- **Consumption:**
30 W.
- **Operating temperature:**
-25°C a +60°C.
- **Humidity:**
< 95%
- **Net weight:**
48 Kg.
- **Access direction:**
UNIDIRECTIONAL or BIDIRECTIONAL.
- **Flow rate:**
30 people/minute.
- **Step width:**
50 cm. up to 80 cm.
- **Activation time opening:**
100 ms.
- **Preinstallation access control equipment:**
Hollow of 13 cm. x 13 cm. and 14 cm. x 10 cm.
- **EMERGENCY system:**
Automatic drop arms to power failure.
- **RESTORATION mode:**
Manual.
- **INTERFACE:**
Microcontroller system for the functions and routing of the barrier. Accept signals from external controller.
- **Contact INPUTS:**
Free of tension.
- **ANCHOR mode:**
On the finished floor.
- **OPTIONS:**
 - Stainless steel tube railings.
 - Console with remote operating control buttons.
 - Shelter cover.
 - Stand for tripod urnstile placement.
 - Technical Support.


Dimensions

(All measurements are in cm.)

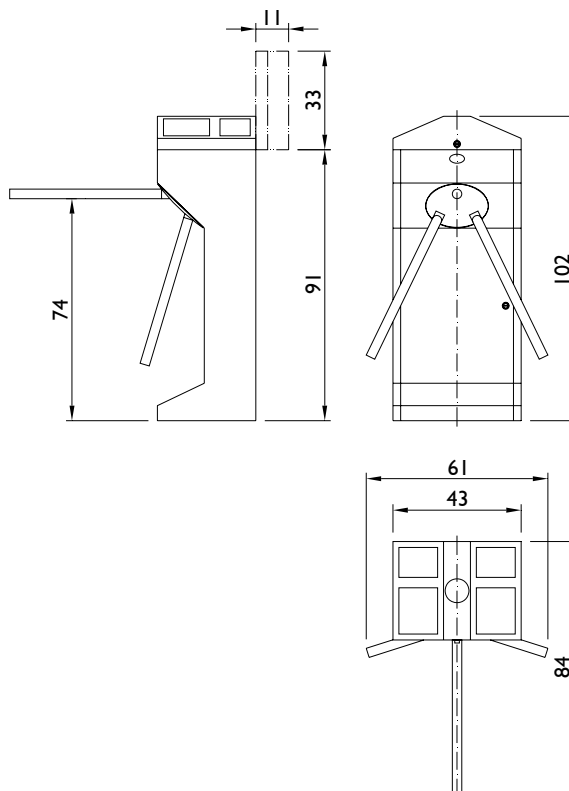


Turnstiles group provision

(All measurements are in cm.)

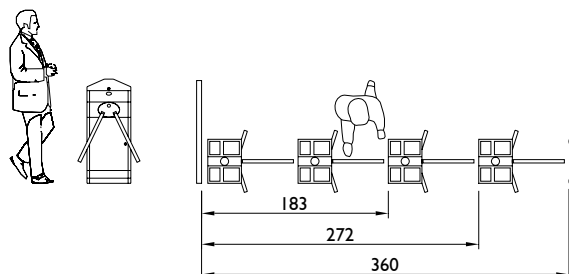

Anchor Template

(All measurements are in cm.)



The product may not match the images shown. The information contained in this document is subject to change without notice. The SALFORD product warranties are set forth in the express warranty that came with them. Nothing herein should be construed as constituting an additional warranty. The manufacturer is not liable for any errors or omissions in editorial or technical nature that may exist in this document. Other company and product names may be trademarks of others.

