



C7x50

Sensor Gates

"With a great value for money. Designed to ensure access control QUICK, EFFICIENT and SAFE in areas of high flow of people"



C7x50 SALFORD sensor gates are the best solution to facilitate the movement of people. Its COMPACT OVERALL DESIGN allows for multiple corridors of access to a massive people traffic, both inside and outside protected from water.

They are equipped with preinstallation of readers, keypad and display on the head. They are also equipped with pictogram signs by which visual reports of their state of operation.

Have easy access inside through its top and side covers for the initial anchorage to the ground and the other works of installation and maintenance. **C7x50 SALFORD** sensor gates also have a large space inside to accommodate electronic devices for access control.

In the event of a power cut or power failure, the panels are set allowing the free passage. As an option, also have a ANTI PANIC system with automatic opening leaving open space for building evacuation.

As a safety and security, **C7x50 SALFORD** sensor gates have a system with photocells and acoustic signals which prevents the closure of the panels and any accidental hit while the user remains in step and warning other potential abnormal situations use.

All components used in the manufacture of **SALFORD** products have been selected to achieve the best results in DURABILITY, STRENGTH and SAFETY.

Specifications

- **Power supply:**
110/230 V AC 50/60 Hz.
- **Consumption:**
70 W.
- **Operating temperature:**
-25°C a +60°C.
- **Humidity:**
< 90%
- **Net weight:**
180 Kg.
- **Step width:**
60 – 70 cm.
- **Access direction:**
UNIDIRECTIONAL or BIDIRECTIONAL.
- **Flow rate:**
30 people/minute.
- **Preinstallation access control equipment:**
Hollow of 13 cm. x 13 cm. and 14 cm. x 10 cm.
- **EMERGENCY system:**
Automatic opening panels to power failure.
- **RESTORATION mode:**
Automatic.
- **INTERFACE:**
Microcontroller system for the functions and routing of the barrier. Accept signals from external controller.
- **Contact INPUTS:**
Free of tension.
- **ANCHOR mode:**
On the finished floor.

Available Models


- **C7350 SALFORD:**
Sensor gate for the formation of 1 corridor.
- **C7750 SALFORD:**
Sensor gates for the formation of 2 or more corridors.



The product may not match the images shown. The information contained in this document is subject to change without notice. The SALFORD product warranties are set forth in the express warranty that came with them. Nothing herein should be construed as constituting an additional warranty. The manufacturer is not liable for any errors or omissions in editorial or technical nature that may exist in this document. Other company and product names may be trademarks of others.


Dimensions

(All measurements are in cm.)

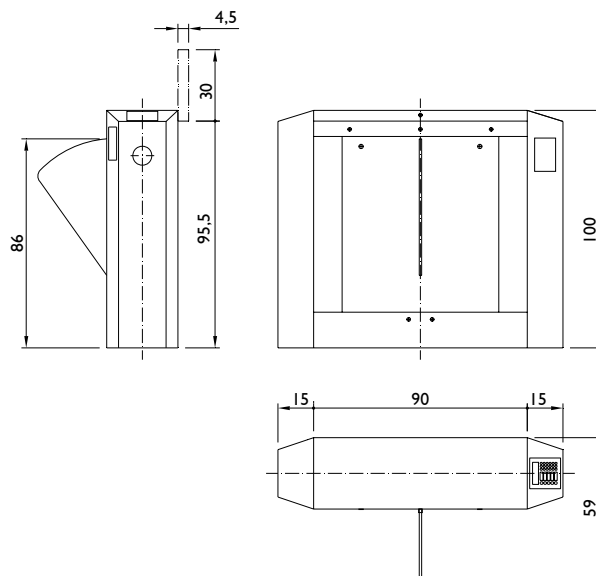

C7750 group provision

(All measurements are in cm.)

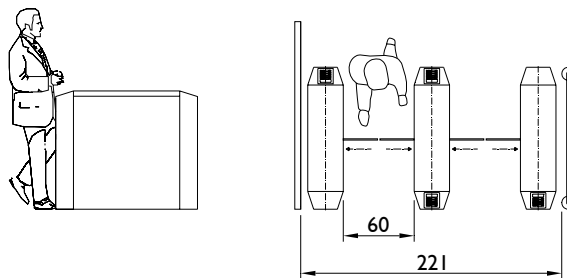

Anchor template

(All measurements are in cm.)

